

1009-HAZ Series

Hazardous Location High Bay

Jobsite Lighting



Industry Leading Features:


- cETLus Listed
- Universal Input Driver - 100-277V
- Various Available Lumen Outputs
- IP66 Rated
- High efficacy: up to 140lm/W
- CRI>80
- Surface and pendant mounting
- Copper free aluminum enclosure
- High vibration resistance
- 5 year warranty
- Ambient temperature range: -40°C to 60°C

Market Applications:

- Oil & Gas industries
- Refineries
- Pumping Stations
- Mining
- Vessel lighting
- High humidity areas
- High temperature locations
- Painting Applications
- Industrial Manufacturing
- Petrochemical

Ratings and Certifications:

- cETLus
- UL844
- NEMA 4X, IP66
- CSA C22.2 No.137/No.250.0
- Class I Division 2, Groups A, B, C, D
- Class II Division 1, Groups E, F, G
- Class II Division 2, Groups E, F, G
- Class III
- Marine and Wet locations
- UL 1598 / UL1598A




Unique Features:



8400, 11200 & 14000
Lumen Outputs



Wet Location, Marine Duty
NEMA 4X, IP66

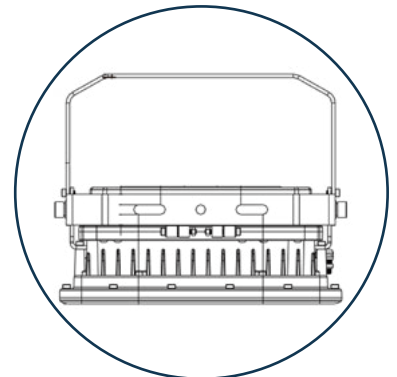


Trunnion or rigid conduit
pendant mounting

Selection Guide:


Part Number	Wattage	CCT	Voltage*	Lumens	Working Hours	CRI
1009-HAZ-60	60	5000K	AC100-277V	8400	5 years	80
1009-HAZ-80	80	5000K	AC100-277V	11200	5 years	80
1009-HAZ-100	100	5000K	AC100-277V	14000	5 years	80

*480V driver available

Structure Diagram:

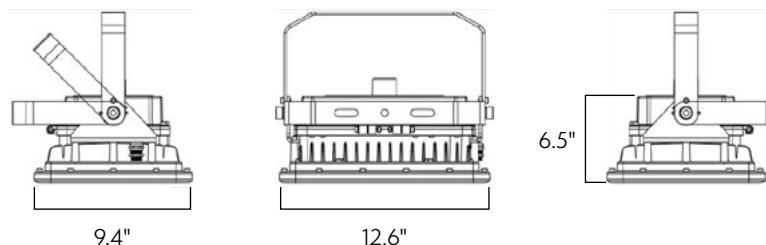

Photometrics:



Related Products:

Click on an image or scan the QR Code for more product information.



2600 Series Hand Lamp
Class I, Div 1



SL HAZ
Class I, Div II Stringlight



123100 Series
Class I, Div I
Hazardous Location Stringlight



1007 LED Hazardous Location
Highbay Series



Ericson Manufacturing Company
4323 Hamann Parkway
Willoughby, OH 44094, USA



1-800-ERICSON
info@ericson.com
L1000790H

ericson.com